

TECHNICAL DATASHEET

Black Compound QC-TB001

PRODUCT DESCRIPTION

QC-TB001 is a ready compound made from mineral and byproduct materials. This sustainable compound is engineered to offer good dispersion and processability on plastic extrusion lines.

TYPICAL APPLICATIONS

Blown Extrusion (e.g. Trash Bag)

RECOMMENDED USAGE

For further recommendations, please refer to our Technical Department.

TYPICAL PROPERTY VALUES

PROPERTY	UNIT	VALUE RANGE	METHOD
Specific Density	g/cm ³	1.050 - 1.205	ASTM D792
Melt Flow Rate (190°C, 2.16Kg)	g/10 min	0.95 - 1.55	ASTM D1238
Moisture Content	%	< 0.06	In-house Method

PACKING

Pellet form, packed in PE bags of 25Kg each or 1,100Kg FIBC bags.

STORAGE AND HANDLING


Not to exceed 6 months. Storage in very humid areas or under direct sunlight should be avoided.

SAFETY

Not classified as hazardous material.

RECYCLING

This product can be recycled using current methods of shredding and cleaning. Production waste should be properly segregated and kept clean to facilitate direct recycling.

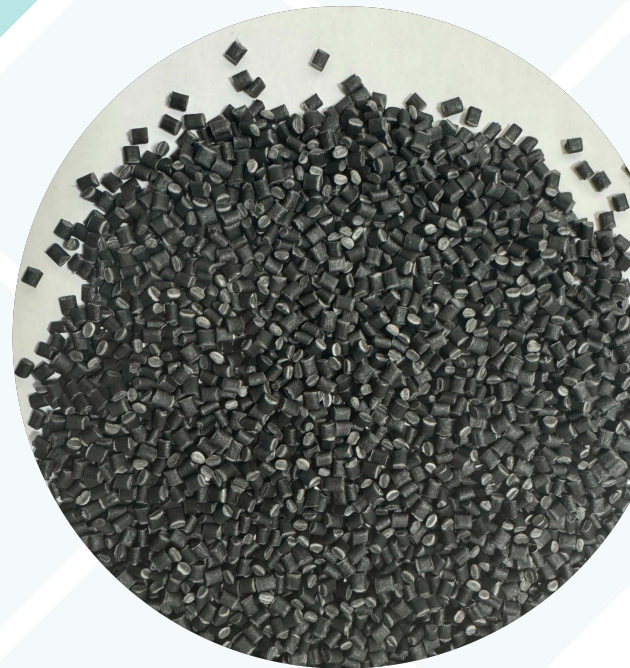

COMPOUND

QC-TB001